



INO circle

suspended


EN Ring shaped luminaire housing from rolled aluminium extruded profile, seamlessly welded; surface powder coated; pendant fitting with cable suspension; height adjustment without tools; incl. transparent feed; electronic operating unit installed in the canopy; completely homogeneously illuminated, satinised PMMA cover; inwards facing emission characteristics; direct/indirect illumination characteristic for additional emphasis of the ceiling and more visual comfort; energy-efficient LEDs with very good colour rendering; canopy with 2 cable openings and plug-in terminal for through wiring; sound absorbing elements available

DE Ringförmiger Leuchtenkörper aus gerolltem Aluminiumstrangpressprofil nahtlos verschweißt; Oberfläche pulverbeschichtet; abgependelt mit Seilabhängung; werkzeuglose Höhenverstellung; inkl. transparenter Einspeisung; elektronisches Betriebsgerät im Baldachin verbaut; absolut homogen ausgeleuchtete, satinierte PMMA-Abdeckung; nach innen gerichtete Abstrahlcharakteristik; direkt/indirekte Abstrahlcharakteristik für zusätzliche Akzentuierung der Decke und mehr Sehkomfort; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Baldachin mit 2 Kabelöffnungen und Steckklemme für Weiterverdrahtung; schallabsorbierende Elemente erhältlich


Quickinfo

2700 K, 3000 K, 4000 K
 CRI ≥ 90, 3 SDCM
 up to 120 lm/W
 L90 @ 50 000 h
 DALI-2
 opal

Types



Colours



Light distribution




acoustic elements




DiiA® standards
 251, 252, 253



direct/indirect illumination



tunable white
 2700–6500 K



CRI ≥ 98
 XPECTRUM

Order options

SUSPENSION

cable 2000mm/canopy central
INO triple cable 5000m

COLOUR TEMPERATURE

2700K	4
3000K	5
4000K	6

CONTROL

DALI-2

MATERIAL COLOUR

<input type="radio"/> pure white RAL 9010	7
<input type="radio"/> white aluminium RAL 9006	G
<input type="radio"/> jet black RAL 9005	8
<input type="radio"/> special colours* p. 992	X

*canopy always in white

LIGHT OPTIC COVER

opal high performance

Options on request

SUSPENSION

cable 2000 mm

COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM

CONTROL

Casambi

COLOUR TEMPERATURE

tunable white 2700–6500K

DALI-2 DT8


SHAPES

INO trig suspended

INO hex suspended


INO circle vertical suspended

Light distribution




opal high performance
direct/indirect

LUMINOUS FLUX value calculated for
CRI ≥ 90, colour white, cover opal




INO 700 circle suspended



DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX)	ORDER CODE
31W	2700K	3360lm	0 3 4 - 3 4 4 2 :: 3 H
	3000K	3530lm	
	4000K	3700lm	




INO 900 circle suspended




DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
37W	2700K	4030lm	0 3 4 - 3 4 4 3 :: 3 H
	3000K	4240lm	
	4000K	4440lm	




INO 1200 circle suspended




DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
50W	2700K	5370lm	0 3 4 - 3 4 4 4 :: 3 H
	3000K	5650lm	
	4000K	5920lm	




INO 1500 circle suspended



DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
62W	2700K	7380lm	0 3 4 - 3 4 4 5 :: 3 H
	3000K	6720lm	
	4000K	7060lm	

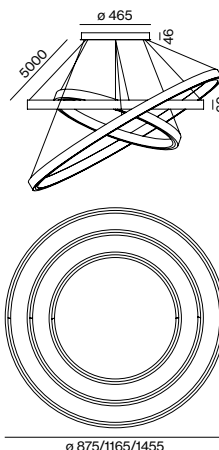

INO TRIPLE circle suspended



DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
150W	2700K	16100lm	0 3 4 - 3 8 4 5 :: 3 H
	3000K	16900lm	
	4000K	17800lm	