

Description

EN Midget luminaire profile made of extruded aluminium; surface black or natural anodised; spot 352° rotatable and 90° tiltable; plug and play electrical connector system for toolless mounting; available in 2 (JUST 26) or 3 (JUST 16 and JUST 32) beam angles; JUST 26 and 32: optical attachments available as accessories; passively cooled high-power LED system; available in the light colours 3000K and 4000K; min. 90% of the luminous flux after 50 000 hours; colour rendering CRI ≥ 90 or CRI ≥ 95 (R9 ≥ 90); 75mm light point spacing; 700mA converter plug and play; converter separately available; degree of protection IP 20; PC II (power supply) or PC III (light insets); optionally non-dimmable or DALI-2 control

IT Profilo faretto miniatura in alluminio estruso; superficie nera o anodizzata naturale; riflettore girevole a 352° e orientabile di 90°; montaggio senza attrezzi tramite connettore con innesto rapido a baionetta; disponibile in 2 (JUST 26) o 3 (JUST 16 e JUST 32) diversi angoli del fascio; JUST 26 e 32: unità ottiche disponibili come accessori; sistema LED High Power a raffreddamento passivo; disponibile in temperatura di colore 3000K e 4000K; min. 90% di flusso luminoso rimanente dopo 50 000h di durata; reso cromatico CRI ≥ 90 o CRI 95, R9 ≥ 90; distanza punto luce 75mm; convertitore da 700mA premontato e pronto all'uso; convertitore da ordinare separatamente; protezione IP 20; classe isolamento II (alimentazione) o classe isolamento III (unità luce); a scelta non dimmerabile o comandi con DALI-2

NANO just 16/26/32


recessed

Quickinfo


3000 K, 4000 K
 CRI ≥ 95 (R9 ≥ 90)
 L90 @ 50 000 h
 JUST 16 up to 97 lm per spot
 JUST 26 up to 170 lm per spot
 JUST 32 up to 325 lm per spot
 non DIM, DALI-2

Types


JUST 16



JUST 26



JUST 32



Colours



Light distributions



spot med. flood

Order options

COLOUR TEMPERATURE ☼☼

3000K CRI≥95 90lm*	5
4000K CRI≥95 97lm*	6

*per spot | CRI≥95 (R9≥90) | 700mA | 60°C

MATERIAL COLOUR ▣

anodised aluminium	6
anodised black	8




BEAM ANGLE ▲


spot 20°	S
medium 30°	M
flood 40°	F




NANO just 16



SYSTEM POWER / VOLTAGE	NO. OF LEDES	L (mm)	ORDER CODE
2x1.2W / 3V	2	150	007-4022:1▲




ILLUMINANCE EXAMPLE (E_{max} in lux)



BEAM ANGLE	COLOUR TEMP.	HEIGHT 0.3 m 3x(2x1.2W)
20°	3000K	6467
30°	3000K	5528
40°	3000K	4445

reflection factors 0.2/0.5/0.7 | maintenance factor 0.8

LIGHT DISTRIBUTION

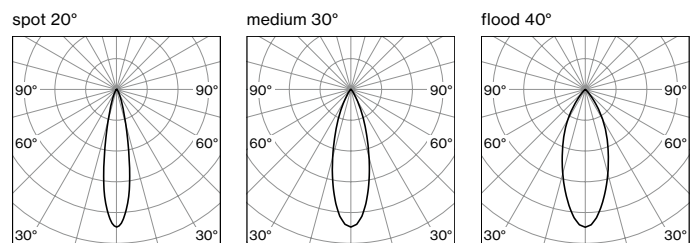

Order options

LENGTH L

175 mm	0
1000 mm	2
2000 mm	4
4000 mm	6

Electrical accessories

CONVERTER supply 220-240 V AC, 700 mA, 50-60 Hz, PC II
incl. power cable 2 m + connection cable with plug 1 m

TYPE	SPOTS	CABLE (m)	L-W-H (mm)	ORDER CODE
8 W / 2,5-12 V non DIM	2-6	max.18	64-34-21	007-1953110
10 W / 7-14 V non DIM	6-8	max.5	95-53-25	007-1953210
20 W / 2-28 V non DIM	2-16	max.10	111-52-22	007-1953310
45 W / 20-54 V non DIM	14-32	max.11	215-70-31	007-1953510
20 W / 2-28 V DALI-2	2-16	max.10	111-52-22	007-1953330
38 W / 10-54 V DALI-2	8-32	max.11	147-44-30	007-1953530

SPLITTER SERIAL, AWG22

TYPE	INPUT / OUTPUT	L-W-H (mm)	ORDER CODE
splitter 700 mA + cable 500 mm	1x socket / 9x plug	85-50-10	007-1959310
adapter cable 100 mm	1x socket / 1x plug	-	007-1963210

EXTENSION CABLE

TYPE	INPUT / OUTPUT	L (mm)	ORDER CODE
extension cable	1x socket / 1x plug	-	007-1961110
extension cable	2x plug	75	007-1962110
extension cable	2x plug	100	007-1962210
extension cable	2x plug	125	007-1962310

Order options

COLOUR TEMPERATURE

3000 K CRI ≥ 95 160lm*	5
4000 K CRI ≥ 95 170lm*	6

*per spot | CRI ≥ 95 (R9 ≥ 90) | 700mA | 69°C

MATERIAL COLOUR

anodised aluminium	6
anodised black	8




BEAM ANGLE


spot 14°	S
flood 30°	F




NANO just 26



SYSTEM POWER / VOLTAGE	NO. OF LEDS	L (mm)	ORDER CODE
1x2,4 W / 3 V	1	150	007-4061::1▲▲
2x2,4 W / 6 V	2	150	007-4062::1▲▲




ILLUMINANCE EXAMPLE (E_{max} in lux)



BEAM ANGLE	COLOUR TEMP.	3x(1x2,4W)	HEIGHT 0.3 m 3x(2x2,4W)
14°	3000 K	16147	17648
30°	3000 K	5255	8958

reflection factors 0.2/0.5/0.7 | maintenance factor 0.8

LIGHT DISTRIBUTION

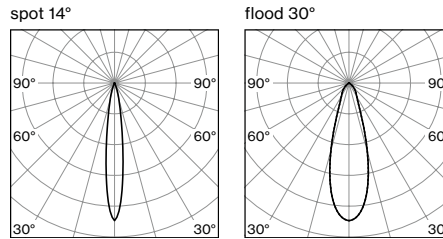

Order options

LENGTH

175 mm	0
1000 mm	2
2000 mm	4
4000 mm	6

Electrical accessories

CONVERTER supply 220-240V AC, 700mA, 50-60Hz, □ PC II
incl. power cable 2m + connection cable with plug 1m

TYPE	SPOTS	CABLE (m)	L-W-H (mm)	ORDER CODE
8 W / 2,5-12 V non DIM	1-3	max.18	64-34-21	007-1953110
10 W / 7-14 V non DIM	3-4	max.5	95-53-25	007-1953210
20 W / 2-28 V non DIM	1-8	max.10	111-52-22	007-1953310
45 W / 20-54 V non DIM	7-16	max.11	215-70-31	007-1953510
20 W / 2-28 V DALI-2	1-8	max.10	111-52-22	007-1953330
38 W / 10-54 V DALI-2	7-16	max.11	147-44-30	007-1953530

SPLITTER SERIAL, AWG22

TYPE	INPUT / OUTPUT	L-W-H (mm)	ORDER CODE
splitter 700 mA + cable 500 mm	1x socket / 9x plug	85-50-10	007-1959310
adapter cable 100 mm	1x socket / 1x plug	-	007-1963210

EXTENSION CABLE

TYPE	INPUT / OUTPUT	L (mm)	ORDER CODE
extension cable	1x socket / 1x plug	-	007-1961L10
extension cable	2x plug	75	007-1962110
extension cable	2x plug	100	007-1962210
extension cable	2x plug	125	007-1962310

Optical accessories

TYPE	Ø-H (mm)	ORDER CODE
honeycomb louver	23-4	007-1965148
elliptical sculpture foil	23-4	007-1965240
snoot	23-12	007-1965348
colour filter (red, blue, green, etc.)	23-4	on request

Order options

COLOUR TEMPERATURE		●●
3000K	CRI≥90 305lm*	5
4000K	CRI≥90 325lm*	6

*per spot | CRI≥90 | 350 mA | 65 °C


MATERIAL COLOUR		■
anodised aluminium		6
anodised black		8




BEAM ANGLE		▲
spot 19°		S
medium 27°		M
flood 42°		F





NANO just 32



SYSTEM POWER / VOLTAGE	NO. OF LEDS	L (mm)	ORDER CODE
2x3.5W / 10V	2	150	007-4082:1▲




ILLUMINANCE EXAMPLE (E_{max} in lux)



BEAM ANGLE	COLOUR TEMP.	HEIGHT 0.3 m 3x(2x3.5W)
19°	3000K	24017
27°	3000K	18455
42°	3000K	16713

reflection factors 0.2/0.5/0.7 | maintenance factor 0.8

LIGHT DISTRIBUTION

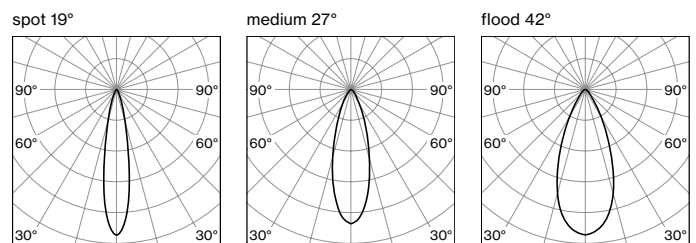

Order options

LENGTH	L
175 mm	0
1000 mm	2
2000 mm	4
4000 mm	6

Electrical accessories

CONVERTER supply 220-240 V AC, 700 mA, 50-60 Hz, PC II
incl. power cable 2 m + connection cable with plug 1 m

TYPE	SPOTS	CABLE (m)	L-W-H (mm)	ORDER CODE
10 W / 7-14 V non DIM	2	max.18	95-53-25	007-1953210
20 W / 2-28 V non DIM	2-4	max.18	111-52-22	007-1953310
45 W / 20-54 V non DIM	6-10	max.18	215-70-31	007-1953510
20 W / 2-28 V DALI-2	2-4	max.18	111-52-22	007-1953330
38 W / 10-54 V DALI-2	4-10	max.18	147-44-30	007-1953530

SPLITTER SERIAL, AWG22

TYPE	INPUT / OUTPUT	L-W-H (mm)	ORDER CODE
splitter 700 mA + cable 500 mm	1x socket / 9x plug	85-50-10	007-1959310
adapter cable 100 mm	1x socket / 1x plug	-	007-1963210

EXTENSION CABLE


TYPE	INPUT / OUTPUT	L (mm)	ORDER CODE
extension cable	1x socket / 1x plug	-	007-1961110
extension cable	2x plug	75	007-1962110
extension cable	2x plug	100	007-1962210
extension cable	2x plug	125	007-1962310

Optical accessories

TYPE	Ø-H (mm)	ORDER CODE
honeycomb louver	30-4	007-1965168
elliptical sculpture foil	30-4	007-1965260
snoot	30-15	007-1965368
colour filter (red, blue, green, etc.)	30-4	on request

NANO channels

Channel 90

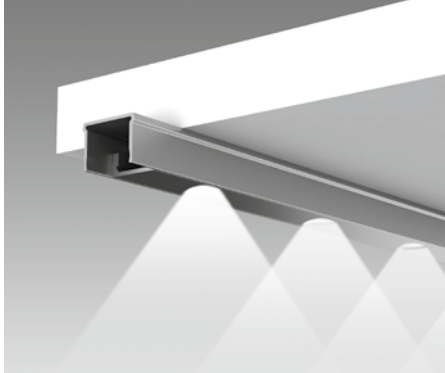

EN Mounting channel for NANO modules for recessed or surface mounting; also as higher variant (90+); variant with straight; for use with a beam angle of 90° onto the lower shelf; mounting tape available

IT Canale di montaggio per moduli NANO ad incasso o soffitto; anche in versione più alta (90+); taglio diritto; angolo del fascio luminoso di 90° sul ripiano inferiore; nastro adesivo da montaggio disponibile

Channel 60



EN Mounting channel for NANO modules for recessed or surface mounting; with straight cut; for use with a beam angle of 60° onto the lower shelf; optimum illumination of shelf niches with equal shelf height and depth; mounting tape available

IT Canale di montaggio per moduli NANO ad incasso o soffitto; taglio diritto; angolo del fascio luminoso di 60° sul ripiano inferiore; illuminamento ottimale delle nicchie di ripiani con stessa altezza e profondità; nastro adesivo da montaggio disponibile


Channel 45




EN Mounting channel for NANO modules for recessed or surface mounting; for use with a beam angle of 45° onto the lower shelf; optimum illumination of shelf niches with low height; shelf height to depth ratio of 1:2

IT Canale di montaggio per moduli NANO ad incasso o soffitto; per applicazioni con angolo del fascio luminoso di 45° sul ripiano inferiore; illuminamento ottimale delle nicchie di ripiani con altezza ridotta; rapporto altezza/profondità ripiano 1:2


Illuminance example

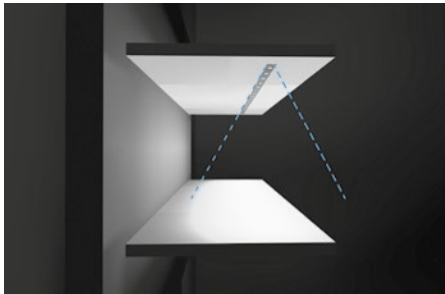

Illuminance example

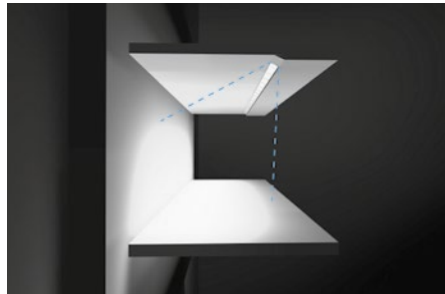

Illuminance example

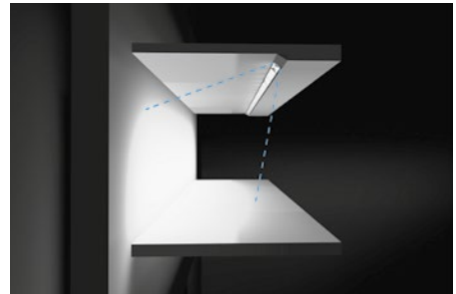

GENERAL


NANO turn 3×(6×1.2W)
3000 K CRI ≥ 95 (R9 ≥ 90)
anodised aluminium
medium 30°

GENERAL


NANO turn 3×(6×1.2W)
3000 K CRI ≥ 95 (R9 ≥ 90)
anodised aluminium
medium 30°

GENERAL


NANO turn 3×(6×1.2W)
3000 K CRI ≥ 95 (R9 ≥ 90)
anodised aluminium
medium 30°



reflection factors 0.2/0.5/0.7 | maintenance factor 0.8




reflection factors 0.2/0.5/0.7 | maintenance factor 0.8




reflection factors 0.2/0.5/0.7 | maintenance factor 0.8


RESULT

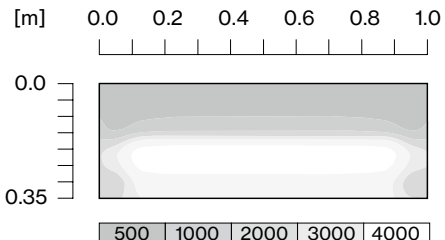

RESULT

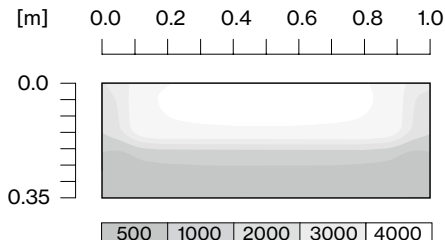

RESULT

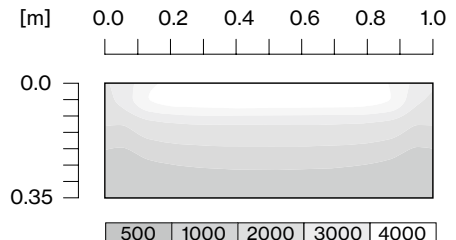

Order options

TYPE

straight cut



MATERIAL COLOUR


anodised aluminium 6
anodised black 8



Mounting channels



NANO CHANNEL 90

L (mm)	ORDER CODE
300	007-190104 <input checked="" type="checkbox"/>
600	007-190106 <input checked="" type="checkbox"/>
900	007-190107 <input checked="" type="checkbox"/>
1200	007-190108 <input checked="" type="checkbox"/>
3000	007-190109 <input checked="" type="checkbox"/>
custom cut (straight cut)	E 84500 ····· <input checked="" type="checkbox"/>
end caps (pair)	007-190301 <input checked="" type="checkbox"/>



NANO CHANNEL 90+



L (mm)	ORDER CODE
300	007-190164 <input checked="" type="checkbox"/>
600	007-190166 <input checked="" type="checkbox"/>
900	007-190167 <input checked="" type="checkbox"/>
1200	007-190168 <input checked="" type="checkbox"/>
3000	007-190169 <input checked="" type="checkbox"/>
custom cut	E 84510 ····· <input checked="" type="checkbox"/>
end caps (pair)	007-191361 <input checked="" type="checkbox"/>



space for up to 3 pieces of power cable



NANO CHANNEL 60

L (mm)	ORDER CODE
300	007-190114 <input checked="" type="checkbox"/>
600	007-190116 <input checked="" type="checkbox"/>
900	007-190117 <input checked="" type="checkbox"/>
1200	007-190118 <input checked="" type="checkbox"/>
3000	007-190119 <input checked="" type="checkbox"/>
custom cut	E 84520 ····· <input checked="" type="checkbox"/>
end caps (pair)	007-190311 <input checked="" type="checkbox"/>



NANO CHANNEL 45

L (mm)	ORDER CODE
300	007-190124 <input checked="" type="checkbox"/>
600	007-190126 <input checked="" type="checkbox"/>
900	007-190127 <input checked="" type="checkbox"/>
1200	007-190128 <input checked="" type="checkbox"/>
3000	007-190129 <input checked="" type="checkbox"/>
custom cut	E 84530 ····· <input checked="" type="checkbox"/>
end caps (pair)	007-190321 <input checked="" type="checkbox"/>



ACCESSORIES

TYPE	ORDER CODE
blind cover 150 mm	007-190281 <input checked="" type="checkbox"/>
blind cover 300 mm	007-190284 <input checked="" type="checkbox"/>
blind cover 600 mm	007-190286 <input checked="" type="checkbox"/>
tape L 3000 mm / W 18 mm	007-191919 <input checked="" type="checkbox"/>

