



## Description

**EN** Recessed wall luminaire in aluminium in a simple, minimalist design; surface anodised and powder coated in dark grey or black; partially printed safety glass, fixed with stainless steel screws; reflector in matt anodised aluminium with asymmetric radiation characteristic; energy-efficient LEDs with very good colour rendering; binning initial  $\leq 3$  MacAdam; available in the light colour 3000 K; CRI  $\geq 80$ ; min. 80% of the luminous flux after 50 000 hours; degree of protection IP 65, with pressure compensation valve; PC I; shock resistance IK 08; ambient temperatures from  $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$ ; separate luminaire wiring compartment, suitable for through wiring

**FR** Luminaire mural encastré en aluminium dans un design sobre et épuré ; surface anodisée (protection) et thermolaquée en gris foncé ou noir ; verre de sécurité partiellement imprimé, fixé avec vis en inox ; Réflecteur en aluminium pur mat anodisé avec caractéristique de rayonnement asymétrique ; LED économes en énergie à restitution de couleur élevée ; binning initial  $\leq 3$  MacAdam ; livrable dans la couleur de lumière 3000 K ; CRI  $\geq 80$  ; min. 80 % du flux lumineux au bout de 50 000 h de durée de vie ; genre protection IP 65, avec soupape compensation pression ; CP I ; résistance aux chocs IK 08 ; Températures ambiantes de  $-20^{\circ}\text{C}$  à  $+50^{\circ}\text{C}$  ; logement séparé de branchement de luminaire, convient à un câblage passant

## STREAMCUT

wall recessed

### Quickinfo

3000 K  
CRI  $\geq 80$   
L80 @ 50 000h  
up to 293lm  
non DIM  
IK 08, IP 65

### Type



### Colours



### Light distribution



### Order options

#### IP RATING

IP65

#### COLOUR TEMPERATURE

3000K

#### CONTROL

non DIM

#### MATERIAL COLOUR


dark grey



D

black

8




### STREAMCUT wall





#### IP65 ASYMMETRIC

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
8.4 W	3000K	293lm	0 8 8 - 2 8 3 1 5 1 <input checked="" type="checkbox"/>

### Illumination example

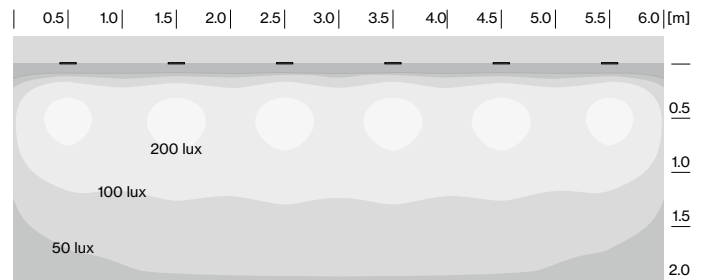

**STREAMCUT wall** (8.4 W, 6 luminaires)  
 wall mounting height from bottom: 0.8 m / distance between luminaires: 1.0 m



### Accessory

#### MOUNTING HOUSING FOR CONCRETE AND SOLID WALLS

TYPE	L-W-H (mm)	ORDER CODE
concrete / solid walls	290-100-200	0 8 8 - 2 8 9 1 1 1 0