



Description

^{EN} Recessed wall luminaire in aluminium in a simple, minimalist design; surface anodised and powder coated in dark grey or black; partially printed safety glass, fixed with stainless steel screws; reflector in matt anodised aluminium with asymmetric radiation characteristic; energy-efficient LEDs with very good colour rendering; binning initial ≤ 3 MacAdam; available in the light colour 3000 K; CRI ≥ 80 ; min. 80% of the luminous flux after 50 000 hours; degree of protection IP 65, with pressure compensation valve; PC I; shock resistance IK 08; ambient temperatures from -20°C to $+50^{\circ}\text{C}$; separate luminaire wiring compartment, suitable for through wiring

▮ Apparecchio da incasso in parete in alluminio, design sottile e minimale; superficie anodizzata e verniciata a polveri in grigio scuro o nero; vetro di sicurezza parzialmente serigrafato, fissato con viti di acciaio inox; riflettore in alluminio puro anodizzato satinato con emissione asimmetrica; LED ad efficienza energetica con elevata resa cromatica; binning iniziale ≤ 3 MacAdam; disponibile in temperatura di colore 3000 K; CRI ≥ 80 ; min. 80% di flusso luminoso rimanente dopo 50 000 h di durata; protezione IP 65, valvola di compens. pressione; classe isolamento I; resistenza all'urto IK 08; temperature ambiente da -20°C a $+50^{\circ}\text{C}$; vano allacciamento separato, adatto per cablaggio passante

STREAMCUT

wall recessed

Quickinfo

3000 K
CRI ≥ 80
L80 @ 50 000h
up to 293lm
non DIM
IK 08, IP 65

Type



Colours



Light distribution



asym-
metric

Order options

IP RATING

IP65

COLOUR TEMPERATURE

3000K

CONTROL

non DIM

MATERIAL COLOUR


dark grey




D

black

8




STREAMCUT wall





IP65 ASYMMETRIC

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
8.4 W	3000K	293lm	0 8 8 - 2 8 3 1 5 1 <input checked="" type="checkbox"/>

Illumination example

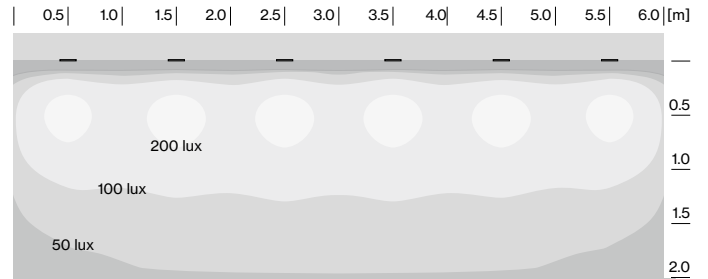

STREAMCUT wall (8.4 W, 6 luminaires)
 wall mounting height from bottom: 0.8 m / distance between luminaires: 1.0 m



Accessory

MOUNTING HOUSING FOR CONCRETE AND SOLID WALLS

TYPE	L-W-H (mm)	ORDER CODE
concrete / solid walls	290-100-200	0 8 8 - 2 8 9 1 1 1 0