



## INO circle

suspended


**EN** Ring shaped luminaire housing from rolled aluminium extruded profile, seamlessly welded; surface powder coated; pendant fitting with cable suspension; height adjustment without tools; incl. transparent feed; electronic operating unit installed in the canopy; completely homogeneously illuminated, satinised PMMA cover; inwards facing emission characteristics; direct/indirect illumination characteristic for additional emphasis of the ceiling and more visual comfort; energy-efficient LEDs with very good colour rendering; canopy with 2 cable openings and plug-in terminal for through wiring; sound absorbing elements available

**FR** Corps de luminaire en forme d'anneau en profil extrudé roulé en aluminium soudé sans trace visible ; surface thermolaquée ; suspension par câble ; réglage en hauteur sans outil ; incl. conduit d'alimentation transparent ; disp. électronique d'alimentation intégré au cache-piton ; cache PMMA, à éclairage parfaitement homogène, satiné ; caractéristique de rayonnement orientée vers l'intérieur ; caractéristique de rayonnement directe/indirecte pour mettre le plafond en valeur et un meilleur confort de vue ; LED économes en énergie à restitution de couleur élevée ; cache-piton avec 2 orifices de câblage et clip de fixation pour câblage continu ; éléments d'absorption acoustique disponible


### Quickinfo

2700 K, 3000 K, 4000 K  
 CRI ≥ 90, 3 SDCM  
 up to 120 lm/W  
 L90 @ 50 000 h  
 DALI-2  
 opal

### Types



### Colours



### Light distribution




acoustic elements




DiiA® standards  
 251, 252, 253



direct/indirect illumination



tunable white  
 2700–6500 K



CRI ≥ 98  
 XPECTRUM

### Order options

#### SUSPENSION

cable 2000mm/canopy central  
INO triple cable 5000 m

#### COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6

#### CONTROL

DALI-2

#### MATERIAL COLOUR

<input type="radio"/> pure white RAL 9010	7
<input type="radio"/> white aluminium RAL 9006	G
<input type="radio"/> jet black RAL 9005	8
<input type="radio"/> special colours* p. 992	X

\*canopy always in white

#### LIGHT OPTIC COVER

opal high performance

### Options on request

#### SUSPENSION

cable 2000 mm

#### COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM

#### CONTROL

Casambi

#### COLOUR TEMPERATURE

tunable white 2700–6500 K

DALI-2 DT8


#### SHAPES

INO trig suspended

INO hex suspended


INO circle vertical suspended

### Light distribution




opal high performance  
direct/indirect

LUMINOUS FLUX value calculated for  
CRI ≥ 90, colour white, cover opal




### INO 700 circle suspended



#### DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX)	ORDER CODE
31W	2700K	3360lm	0 3 4 - 3 4 4 2 :: 3 H
	3000K	3530lm	
	4000K	3700lm	




### INO 900 circle suspended



#### DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
37W	2700K	4030lm	0 3 4 - 3 4 4 3 :: 3 H
	3000K	4240lm	
	4000K	4440lm	




### INO 1200 circle suspended




#### DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
50W	2700K	5370lm	0 3 4 - 3 4 4 4 :: 3 H
	3000K	5650lm	
	4000K	5920lm	




### INO 1500 circle suspended



#### DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
62W	2700K	7380lm	0 3 4 - 3 4 4 5 :: 3 H
	3000K	6720lm	
	4000K	7060lm	

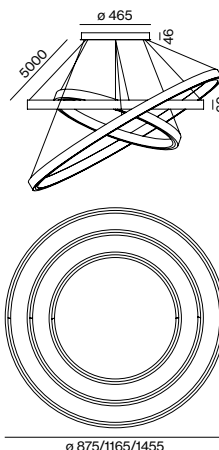

### INO TRIPLE circle suspended



#### DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
150W	2700K	16100lm	0 3 4 - 3 8 4 5 :: 3 H
	3000K	16900lm	
	4000K	17800lm	